




Product data sheet

HDB963SD

Characteristics

Alarm contact, HDB9, SD

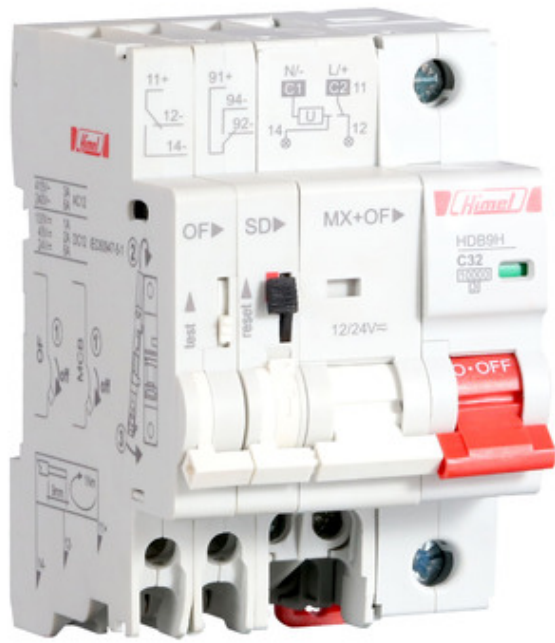

Main

Range of product	HDB9
Product or component type	Alarm contact
Device short name	SD

Complementary

Network frequency	50/60 Hz
[In] rated current	3 A at 415 V AC 6 A at 240 V AC 1 A at 130 V DC 2 A at 48 V DC 6 A at 24 V DC
Clamping connection capacity	1...4 mm ²

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1

Offer Sustainability

Sustainable packaging	No
-----------------------	----

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Himel nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.