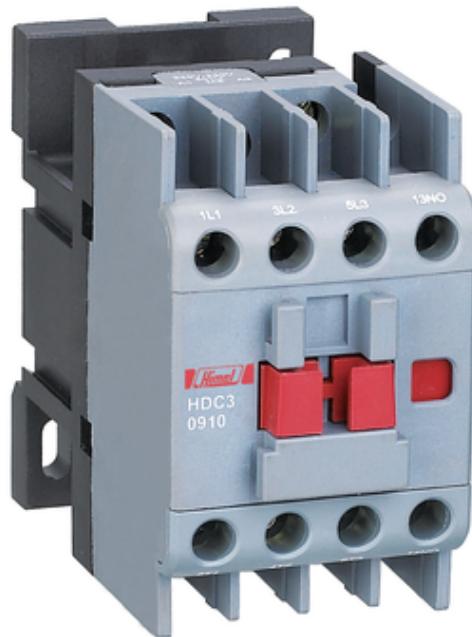


## Product data sheet

**HDC30911Q7**
**Characteristics**
**Contactor, HDC3-0911, 380/400 V, 50/60 Hz**

**Main**

Range of product	HDC3
Product or component type	Contactor
Contactor application	Non-reversing
Poles description	3P
[Ith] conventional free air thermal current	25 A

**Complementary**

Utilisation category	AC-3 AC-4
[In] rated current	9 A
[Uc] control circuit voltage	380/400 V AC 50/60 Hz
Auxiliary contact composition	1 NO + 1 NC
[Ui] rated insulation voltage	690 V
[Ie] rated operational current	9 A at 380/400 V AC-3 6.6 A at 660/690 V AC-3 3.5 A at 380/400 V AC-4 1.5 A at 660/690 V AC-4
Motor power kW	4 kW at 380/400 V AC-3 5.5 kW at 660/690 V AC-3 2.2 kW at 380/400 V AC-4 1.1 kW at 660/690 V AC-4
Net weight	0.31 kg

**Environment**

Installation category	III
Pollution degree	3
Ambient air temperature for operation	-5...40 °C
Average ambient air temperature for operation	= 35 °C (average over 24 hours)
Ambient air temperature for storage	-25...55 °C
Operating altitude	2000 m
Standards	IEC 60947-4-1
Product certifications	CB CE SEMKO
IP degree of protection	IP20
Relative humidity	0...50 % at 0...40 °C 0...90 % at 0...20 °C

**Packing Units**

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	30 cm
Package 1 Width	30 cm
Package 1 Length	40 cm
Package 1 Weight	0.307936507936508 kg

**Offer Sustainability**

Sustainable packaging	No
-----------------------	----