




Product data sheet

HDC33811B7

Characteristics

Contactor, HDC3-3811, 24 V, 50/60 Hz

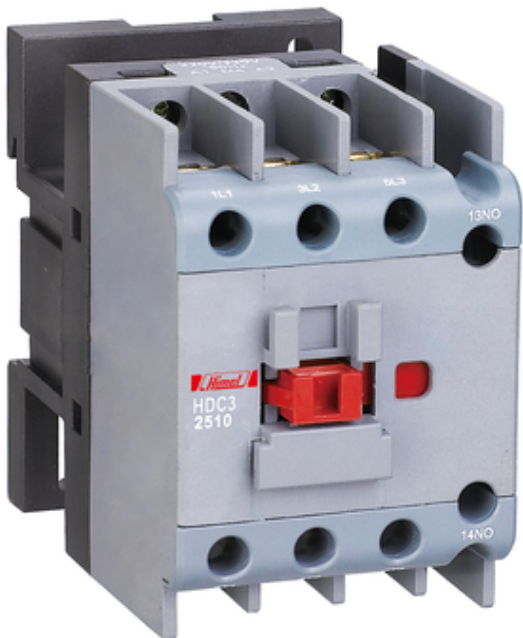

Main

|                                             |               |
|---------------------------------------------|---------------|
| Range of product                            | HDC3          |
| Product or component type                   | Contactor     |
| Contactor application                       | Non-reversing |
| Poles description                           | 3P            |
| [Ith] conventional free air thermal current | 50 A          |

Complementary

|                                |                                                                                                                |
|--------------------------------|----------------------------------------------------------------------------------------------------------------|
| Utilisation category           | AC-3<br>AC-4                                                                                                   |
| [In] rated current             | 38 A                                                                                                           |
| [Uc] control circuit voltage   | 24 V AC 50/60 Hz                                                                                               |
| Auxiliary contact composition  | 1 NO + 1 NC                                                                                                    |
| [Ui] rated insulation voltage  | 690 V                                                                                                          |
| [Ie] rated operational current | 38 A at 380/400 V AC-3<br>22 A at 660/690 V AC-3<br>14 A at 380/400 V AC-4<br>8.9 A at 660/690 V AC-4          |
| Motor power kW                 | 18.5 kW at 380/400 V AC-3<br>18.5 kW at 660/690 V AC-3<br>7.5 kW at 380/400 V AC-4<br>7.5 kW at 660/690 V AC-4 |
| Net weight                     | 0.47 kg                                                                                                        |

Environment

|                                               |                                                |
|-----------------------------------------------|------------------------------------------------|
| Installation category                         | III                                            |
| Pollution degree                              | 3                                              |
| Ambient air temperature for operation         | -5...40 °C                                     |
| Average ambient air temperature for operation | = 35 °C (average over 24 hours)                |
| Ambient air temperature for storage           | -25...55 °C                                    |
| Operating altitude                            | 2000 m                                         |
| Standards                                     | IEC 60947-4-1                                  |
| Product certifications                        | CB<br>CE<br>SEMKO                              |
| IP degree of protection                       | IP20                                           |
| Relative humidity                             | 0...50 % at 0...40 °C<br>0...90 % at 0...20 °C |

Packing Units

|                        |     |
|------------------------|-----|
| Unit Type of Package 1 | PCE |
|------------------------|-----|

|                              |   |
|------------------------------|---|
| Number of Units in Package 1 | 1 |
|------------------------------|---|

Offer Sustainability

|                       |    |
|-----------------------|----|
| Sustainable packaging | No |
|-----------------------|----|