




Product data sheet

HDM3S250OFAL1L

Characteristics

Auxiliary alarm contact, HDM3S, 250, with wire, left

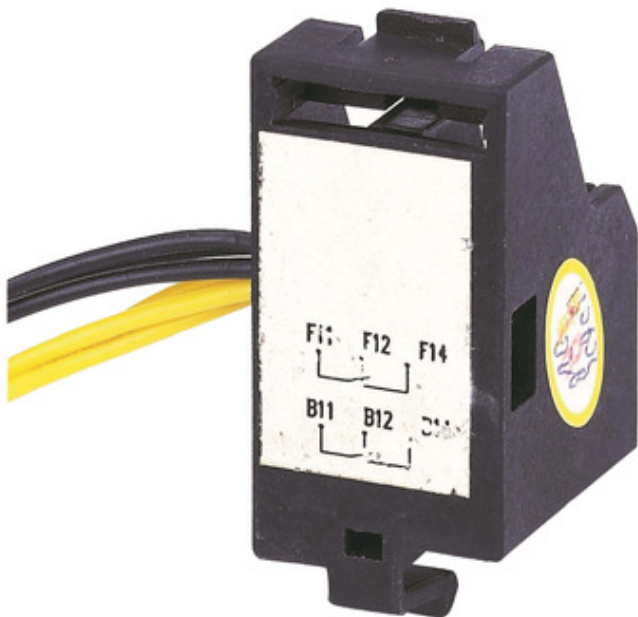

Main

Range of product	HDM3S
Product or component type	Auxiliary/alarm contact

Complementary

[Ie] rated operational current	0.3 A at 400 V AC AC-15 0.15 A at 220 V DC DC-13
Auxiliary connection terminal	Screw terminal, 1.5 mm²
Frame size	250 HDM3S

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1