


Product data sheet

HF4K22

Characteristics

Auxiliary contacts, HDC17K, HF4K-22, top, 2 NO + 2 NC

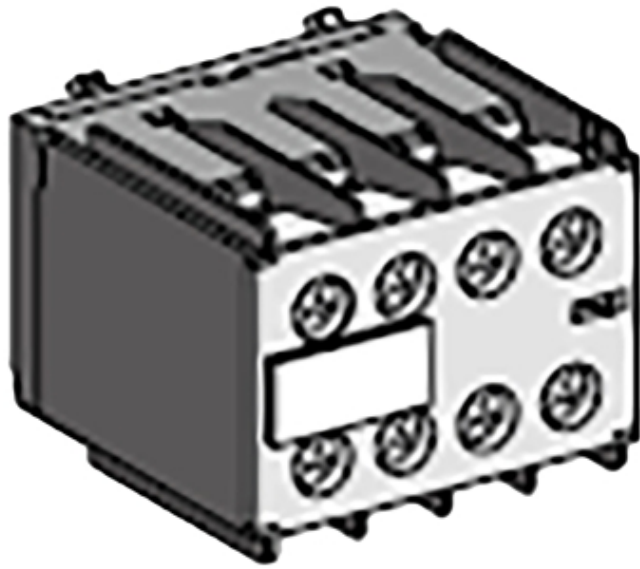

Main

| | |
|-------------------------------|-------------------------|
| Range of product | HDC17K |
| Product or component type | Auxiliary contact block |
| Mounting location | Front |
| Auxiliary contact composition | 2 NO + 2 NC |

Complementary

| | |
|---------------------------------------------|-----------------------------------|
| Product compatibility | HDC17K contactor 6...12 A |
| Auxiliary contacts operation | Instantaneous |
| Shielding continuity terminal | Without |
| [Ui] rated insulation voltage | 690 V conforming to IEC 60947-5-1 |
| [Ith] conventional free air thermal current | 10 A |

Environment

| | |
|---------------------------------------|-------------------|
| Environmental characteristic | Harsh environment |
| Standards | IEC 60947-5-1 |
| Product certifications | CE |
| IP degree of protection | IP20 |
| Ambient air temperature for operation | -25...70 °C |
| Ambient air temperature for storage | -25...70 °C |
| Operating altitude | 2000 m |

Packing Units

| | |
|------------------------------|-----|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |

Offer Sustainability

| | |
|-----------------------|----|
| Sustainable packaging | No |
|-----------------------|----|