


Product data sheet

HF4K22

Characteristics

Auxiliary contacts, HDC17K, HF4K-22, top, 2 NO + 2 NC

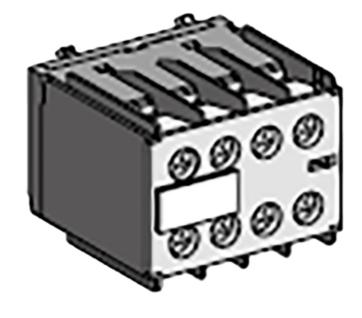

Main

Range of product	HDC17K
Product or component type	Auxiliary contact block
Mounting location	Front
Auxiliary contact composition	2 NO + 2 NC

Complementary

Product compatibility	HDC17K contactor 612 A
Auxiliary contacts operation	Instantaneous
Shielding continuity terminal	Without
[Ui] rated insulation voltage	690 V conforming to IEC 60947-5-1
[Ith] conventional free air thermal current	10 A

Environment

Harsh environment
IEC 60947-5-1
CE
IP20
-2570 °C
-2570 °C
2000 m

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1

Offer Sustainability